

Avasan™ Filter Cartridges

High-Purity Melt Blown Depth Cartridges

Avasan™ (AVS) cartridges are manufactured with a proprietary melt blown manufacturing process using a specially formulated polypropylene polymer. This formulation provides a uniquely graded density filter cartridge designed for high purity applications. The fiber matrix of the cartridge has been engineered to provide structural integrity throughout the long service life of the cartridge and the finish-free construction provides optimum fluid purity and eliminates foaming. Avasan's inherent fluid compatibility properties plus graded density make it the economical filter choice for high clarity requirements.



Contact Information

Parker-Hannifin Corporation
domnick hunter
Process Filtration - North America
2340 Eastman Avenue
Oxnard, California, USA 93030

toll free +1 877 784 2234
phone +1 805 604 3400
fax +1 805 604 3401
dhpsales.na@parker.com

www.parker.com/processfiltration

Benefits

- Continuous bonding of fibers throughout the filter matrix ensures non-fiber releasing construction
- Superior inter-layer bonding provides true three dimensional filtration & a construction that does not compress with increasing pressure
- Pure polypropylene construction
- Finish-free construction provides optimum fluid purity and eliminates foaming
- Graded density construction provides built-in pre-filtration and longer life
- All materials bio-safe in accordance with USP Class VI-121°C Plastic Test
- All materials listed as acceptable for potable and edible contact according to CFR Title 21
- ISO9000:2008 Certified Division

Applications

- DI Water
- R.O. Pre-filtration
- Potable Water
- Plating Solutions
- Chemical Processing Fluids



ENGINEERING YOUR SUCCESS.

Avasan™ Filter Cartridges

Specifications

Materials of Construction:

Filter Medium

100% melt blown polypropylene

End Caps/Adapters (optional)

Various; refer to Ordering Information

Seal Options

Various; refer to Ordering Information

- All materials of construction are FDA listed as acceptable for potable and edible liquid contact according to CFR Title 21.

- Pending Certifications:
NSF - Materials only

Maximum Recommended Operating Conditions:

Temperature

@ 50psid (3.45bar): 80°F (27°C)

@ 25psid (1.72bar): 140°F (60°C)

Flow Rate

5gpm (18.9 lpm) per 10" length

Recommended Maximum

Change Out ΔP: 35psi (2.4bar)


Dimensions (Nominal):

1-1/16 in. (27mm) ID x 2-7/16 in. (62mm) OD (max.)

4, 10, 20, 30, and 40 in. continuous nominal lengths

Nominal Filtration Ratings (90%):

1µm, 3µm, 5µm, 10µm, 20µm, 30µm, 50µm and 75µm

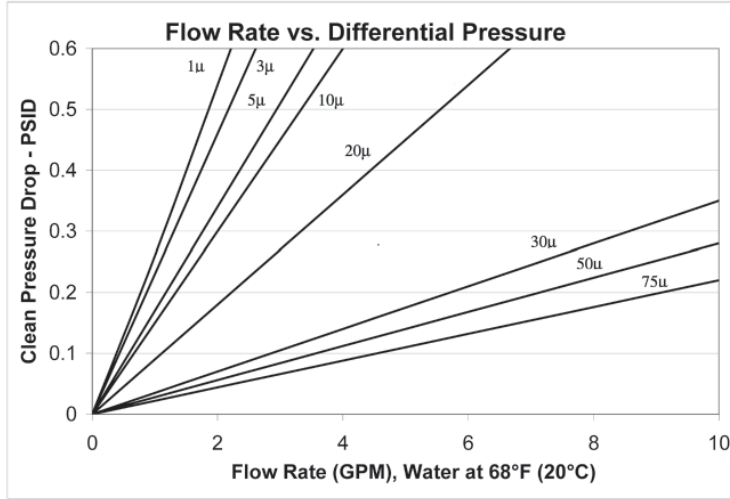

Flow rate is per 10" cartridge. For liquids other than water, multiply the pressure drop by the fluid viscosity in centipoise.

Ordering Information

Cartridge Code		Micron Rating	Nominal Length		End Cap Configuration		Seal Material	
AVS	AVS Cartridge	(µm)	CODE	IN. (mm)	CODE	DESCRIPTION	CODE	MATERIAL
		1	4	4" (102)	None	Double Open End (DOE) w/o gaskets	None	Omit
		3	9.75	9.75" (248)	DO	DOE	A	Poly foam gaskets w/ collars (DO only)
		5	10	10" (254)	LL	120 O-ring both ends**	E	EPR
		10	19.5	19.5" (495)	LR	120 O-ring/Recessed**	N	Buna-N
		20	20	20" (508)	OB	Std. open end/Polypropylene spring closed end	S	Silicone (o-ring only)
		30	29.25	29.25" (743)	PR	213 O-ring/Recessed**	T	PFA Encapsulated Viton® (222, 226 O-ring only)
		50	39	39" (991)	SC	226 O-ring/Flat	V	Viton®
		75	40	40" (1016)	SF	226 O-ring/Fin	W	Poly foam gaskets w/o collars (DO only)
					TC	222 O-ring/Flat		
					TF	222 O-ring/Fin		
					TX	222 O-ring/Flex fin		
					XA	DOE w/extended core		
					XB	Ext. core open end polypropylene spring closed end		

**Available only in 9-3/4" and 19-1/2" lengths.

Specifications are subject to change without notification.
For User Responsibility Statement, see www.parker.com/safety

© 2010 Parker-Hannifin Corporation
domnick hunter Process Filtration - North America
All Rights Reserved
Viton is a registered trademark of E.I. DuPont de Nemours & Co., Inc.



DS_IP_Avasan Rev. A

PROSEP FILTER SYSTEMS LTD
Unit G19
River Bank Way
Lowfields Business Park
Elland
West Yorkshire
HX5 9DN


Tel: 01422 377367

Fax: 01422 377369

Email: enquiries@prosep.co.uk

www.prosep.co.uk

Map and Directions to Prosep Filters Limited

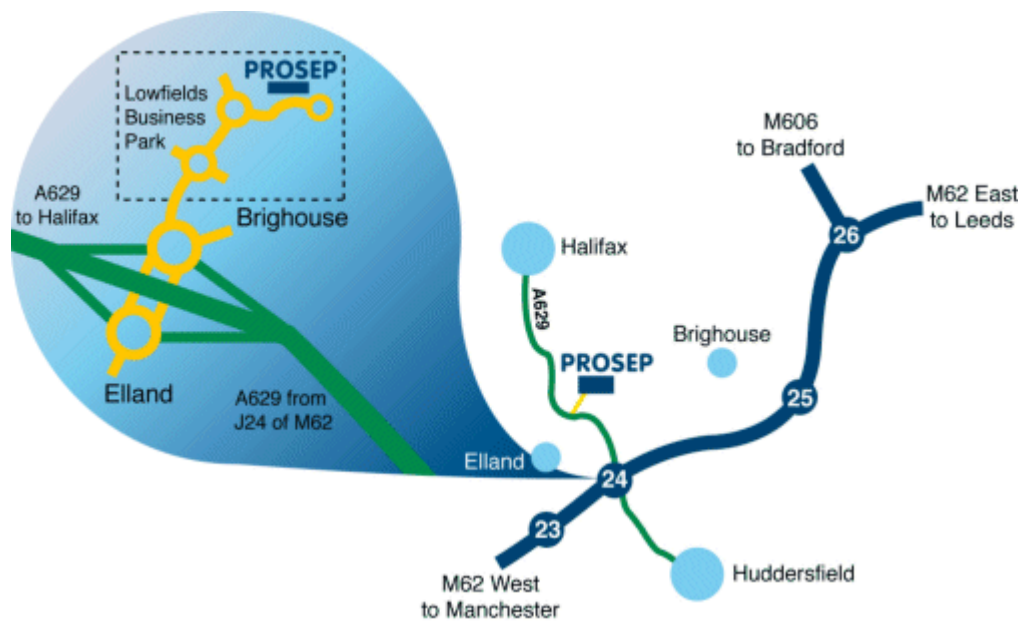

Leave M62 at Junction 24.

At roundabout adjacent to Cedar Court Hotel take 2nd exit onto dual carriageway (A629), signposted Halifax.

Take 1st exit slip road.

At roundabout at end of sliproad, take 3rd exit off.

This is the entrance to Lowfields Business Park.

Proceed straight over 1st roundabout.

At next roundabout take 2nd exit onto River Bank Way - Prosep Filters can be found on the left after the S-bend.

[Link to Google Maps](#)