


PRODUCT INFORMATION

PROSEP
FILTER SYSTEMS

RIGID POCKET HEPA M6—H10

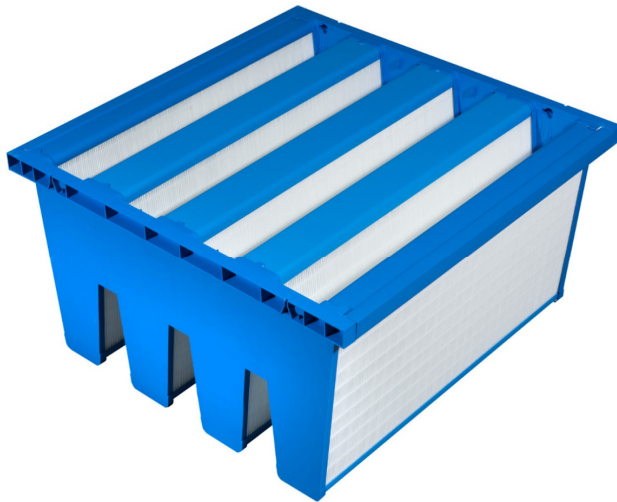

- Choice of media micro-glass or synthetic
- Choice of three standard sizes
- Choice of 20mm or 25mm header frame.
- High flow capacity with low pressure loss
- Fully incinerable with no toxic emissions

Size	Flow Rate	<u>PRESSURE LOSS</u>					H10
		F6	F7	F8	F9	F9	
592 x 292	2500 cu.m/h	130Pa	140Pa	160Pa	180Pa	225Pa	
592 x 490	4250 cu.m/h	130Pa	140Pa	160Pa	180Pa	225Pa	
592 x 592	5000 cu.m/h	130Pa	140Pa	160Pa	180Pa	225Pa	

We recommend that these filters are changed at 350pa differential pressure.
Maximum allowable differential pressure is 450pa

The rigid bag filters represent a considerable technological innovation in comparison with traditional bag filters. These filters can present many advantages when used as first installation or as replacements to traditional bag filters. The RP filters, with expanded cellular polypropylene pressed frame, are incinerable without releasing toxins.

Performance ratings are in accordance to EN779 Classifications F6—H10. This gives performance rated at an average of 0.4 micron particle size with efficiencies in the range 60 to +95%

Polyhedral mini-pleat absolute rated HEPA filters with either synthetic media or glass fibre paper media permanently bonded into a plastic carrier frame with two component cold molded polyurethane. The mini pleats are separated by cotton threads hot melt glued into position. Maximum operating temperature 80 deg. C at 100% RH. The filter may be incinerated without emission of toxic gases.

Prosep Filter Systems Ltd
Unit G19, River Bank Way,
Lowfields Business Park, Elland,
West Yorkshire HX5 9DN

Phone: 01422 377367
Fax: 01422 377369
email: sales@prosep.co.uk
www.prosep.co.uk

for all your filter requirements