


PRODUCT INFORMATION

PROSEP
FILTER SYSTEMS LTD

FILTERS FOR HOT WATER & SOLVENTS



FCPHH
Mesh



APPLICATIONS

- * Water heating systems
- * Household boilers
- * Hot water tanks
- * Photographic laboratories
- * Cosmetic industry
- * Medical applications
- * Do not use on Ketones

These filter housings are made of fiberglass impregnated nylon. The heads are supplied with 3/4" brass BSP inserts. To distinguish them from other filter housings the filter housings are red in colour. The housings withstand high temperatures - up to 93°C and pressures up to 13,8 bar (maximum working pressure). They can be installed in homes - in heating systems, as well as in many industrial applications because of their great chemical resistance properties. They can handle organic solvents*, salt water, alcohol, gasoline and mineral oils. Standard O - rings are made of chemically resistant Silicone 241.

These filter housings are the inexpensive alternative for comparable costly and complicated cast iron or stainless steel housings.

Technical Specifications:


Maximum working temperature:	93°C
Maximum working pressure:	13,8 bar
Dimensions: In/out: Brass	3/4" BSP

Order Code:

For 10" Cartridges	FHHOT-10
For 20" Cartridges	FHHOT-20

Recommended cartridges

Wound cotton
SMP/SMC stainless meshes
FCPHH mesh (10" only)

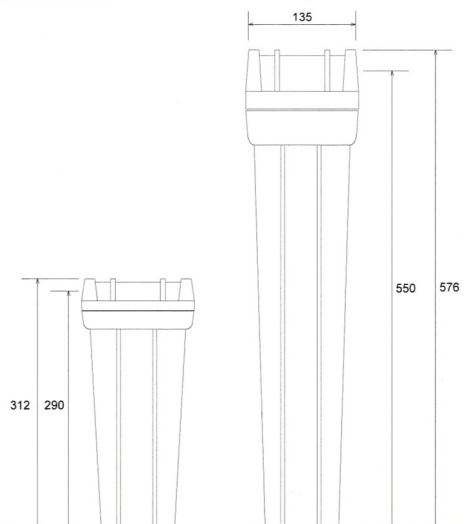

Prosep Filter Systems Ltd
Unit G19, River Bank Way,
Lowfields Business Park,
Elland, West Yorkshire
HX5 9DN

Phone: 01422 377367
email: sales@prosep.co.uk
www.prosep.co.uk



for all your filter requirements